
Cable Strain Relief Connector

- Malleable iron, ductile cast iron or steel, zinc plated.
- Furnished with O-ring and insulating liner
- NPT thread
- Metric thread, PG thread, PF thread (die cast zinc) are optional
- For fixing flexible conduit and cable
- Temperature range:
  -20°C ~ 105°C









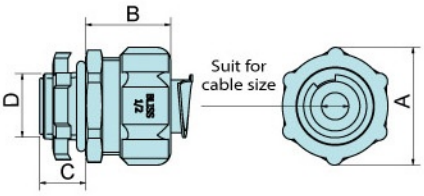

B6131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**B61310304**	29.0	22.5	14.5	21.0	4 - 8	100
NPT 1/2	3/8"	**B61310308**	29.0	22.5	14.5	21.0	8 - 10	100
NPT 3/4	3/4"	**B61310614**	41.5	28.0	16.0	26.4	14 - 18	50
NPT 1	1"	**B61311018**	46.0	31.5	19.5	33.3	18 - 24	50
NPT 1-1/4	1-1/4"	**B61311224**	55.5	34.0	20.5	41.9	24 - 32	25

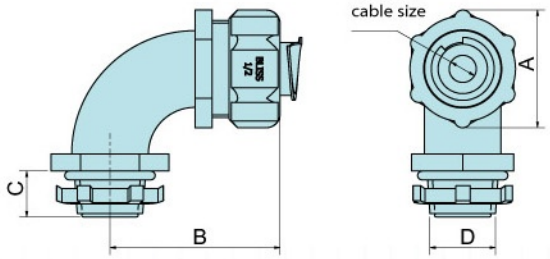

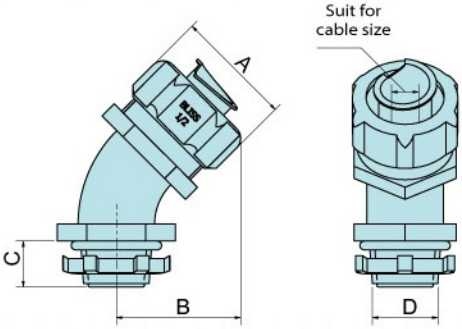



L6131

N6131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**L61310304**	29.0	40.0	14.5	21.0	4 - 8	50
NPT 1/2	3/8"	**L61310308**	29.0	40.0	14.5	21.0	8 - 10	50
NPT 3/4	3/4"	**L61310614**	41.5	53.0	16.0	26.4	14 - 18	25
NPT 1	1"	**L61311018**	46.0	59.0	19.5	33.3	18 - 24	25
NPT 1-1/4	1-1/4"	**L61311224**	55.5	69.0	20.5	41.9	24 - 32	15



N6131

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)				Applicable wire (mm)	Standard Packing (pcs)
			A	B	C	D		
NPT 1/2	3/8"	**N61310304**	29.0	31.0	14.5	21.0	4 - 8	50
NPT 1/2	3/8"	**N61310308**	29.0	31.0	14.5	21.0	8 - 10	50
NPT 3/4	3/4"	**N61310614**	41.5	37.0	16.0	26.4	14 - 18	25
NPT 1	1"	**N61311018**	46.0	46.5	19.5	33.3	18 - 24	25
NPT 1-1/4	1-1/4"	**N61311224**	55.5	53.0	20.5	41.9	24 - 32	15