


Liquid-tight Flexible Steel Conduit - EF Type

A2167

- Certification: CSA Listed, meets CSA C22.2 No.56, file no. 234962
CSA Rating: Dry -25°C~ 60°C, Oil 60°C
CSA Flame classification: FT1.

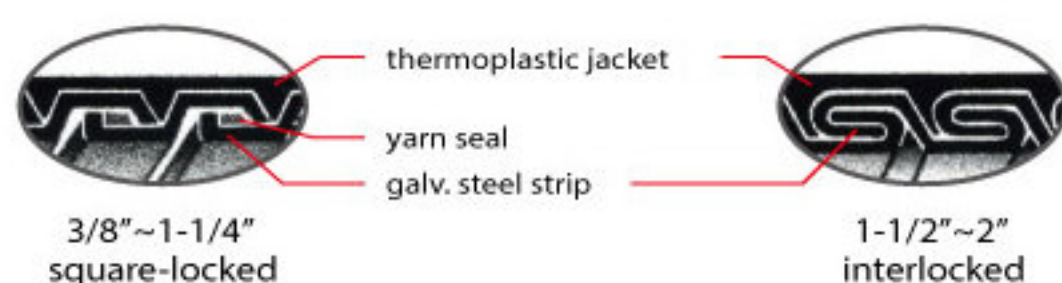

Features

Construction:

- Galvanized steel strip wound, RoHS and UL 360 compliant PVC jacketed.
- Liquid-tight, oil-resistant, flame retardant, and sunlight resistant.
- Sizes 3/8"~1-1/4" by square-locked and filled with cord packing.
Sizes 1-1/2"~2" by interlocked.
- Extra bonding conductor required.
- Color: Black.

Application:

- High tensile, best performance on automatic machinery, sophisticated facility installation.
- For areas with gas and vapor



Trade Size (inch)	Catalog Number	Min. I.D. (mm)	Max. I.D. (mm)	Min. O.D. (mm)	Max. O.D. (mm)	Min. Bending Radius (mm)	Packing (m)
3/8"	A21670300	12.29	12.80	17.50	18.00	51.0	50
1/2"	A21670400	15.80	16.31	20.80	21.30	76.0	50
3/4"	A21670600	20.83	21.34	26.20	26.70	101.5	30
1"	A21671000	26.44	27.08	32.80	33.40	127.0	30
1-1/4"	A21671200	35.05	35.81	41.40	42.20	159.0	15
1-1/2"	A21671400	40.01	40.64	47.40	48.30	190.5	15
2"	A21672000	51.31	51.94	59.40	60.30	254.0	15