


## Nylon Connector - PF Thread

- Polyamide 6 (Nylon 6) (PA6), meets UL 94 V2
- PF thread
- Light, fast-installation
- Weather resistant
- For type A2017, A2018 flexible metal conduit
- Temperature range: -10°C ~ 120°C
- Color: Black, gray
- IP65

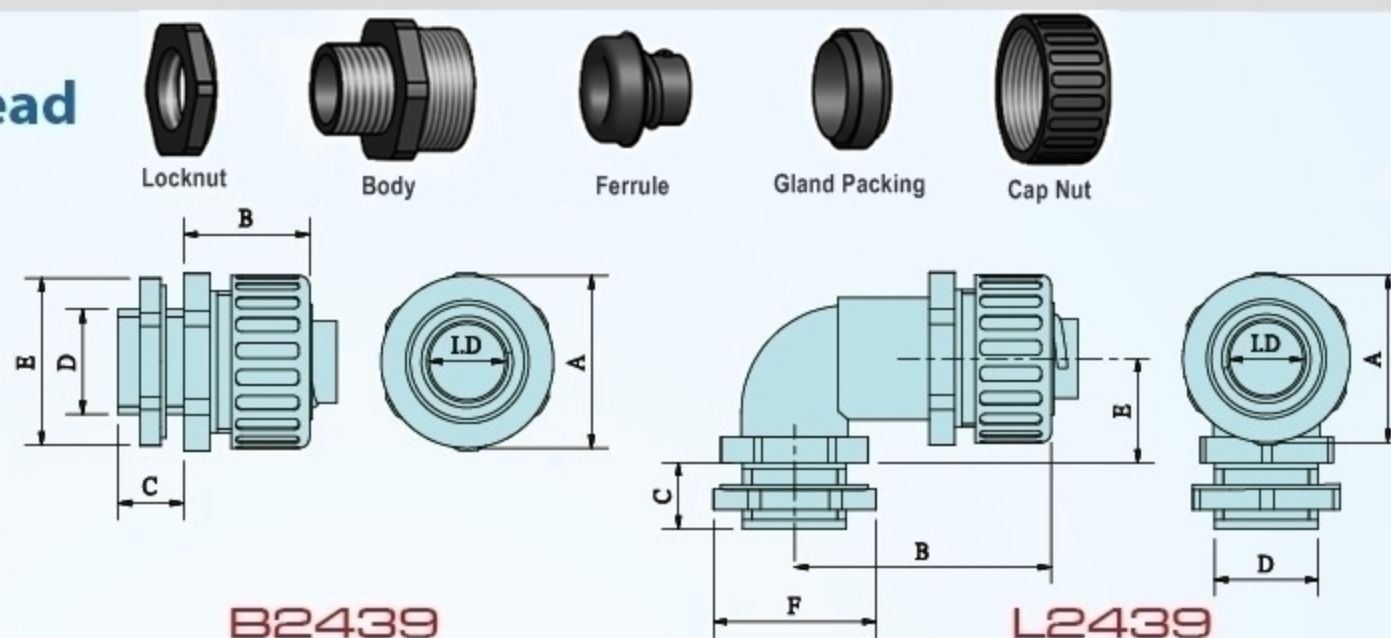

B2439

L2439

Thread	Trade Size (inch)	Catalog Number		Dimension (mm)						Standard Packing (pcs)
		Black	Gray	ID	A	B	C	D	E	
PF 1/2	3/8"	B24390300	B25390300	10.5	28.0	23.0	13.0	21.0	32.0	100
PF 1/2	1/2"	B24390400	B25390400	13.5	33.0	23.0	13.0	21.0	32.0	100
PF 3/4	3/4"	B24390600	B25390600	18.5	39.0	28.0	13.0	26.4	40.0	50
PF 1	1"	B24391001*	B25391001*	25.0	46.0	31.0	15.0	33.3	47.5	50
PF 1-1/4	1-1/4"	B24391201*	B25391201*	33.5	55.5	33.0	17.0	41.9	55.5	25

\*Steel Ferrule

Thread	Trade Size (inch)	Catalog Number		Dimension (mm)							Standard Packing (pcs)
		Black	Gray	ID	A	B	C	D	E	F	
PF 1/2	3/8"	L24390300	L25390300	10.5	28.0	44.0	13.0	21.0	20.0	32.0	50
PF 1/2	1/2"	L24390400	L25390400	13.5	33.0	44.0	13.0	21.0	20.0	32.0	50
PF 3/4	3/4"	L24390600	L25390600	18.5	39.0	52.0	13.0	26.4	25.0	40.0	25




B2439



L2439

## Nylon Screw-in Connector

- Polyamide 6 (Nylon 6) (PA6), meets UL 94 V2
- Ferrule integrated with body.
- PF thread
- Light, fast-installation
- Weather resistant
- For type A2017, A2018 flexible metal conduit
- Temperature range: -10°C ~ 120°C
- IP50

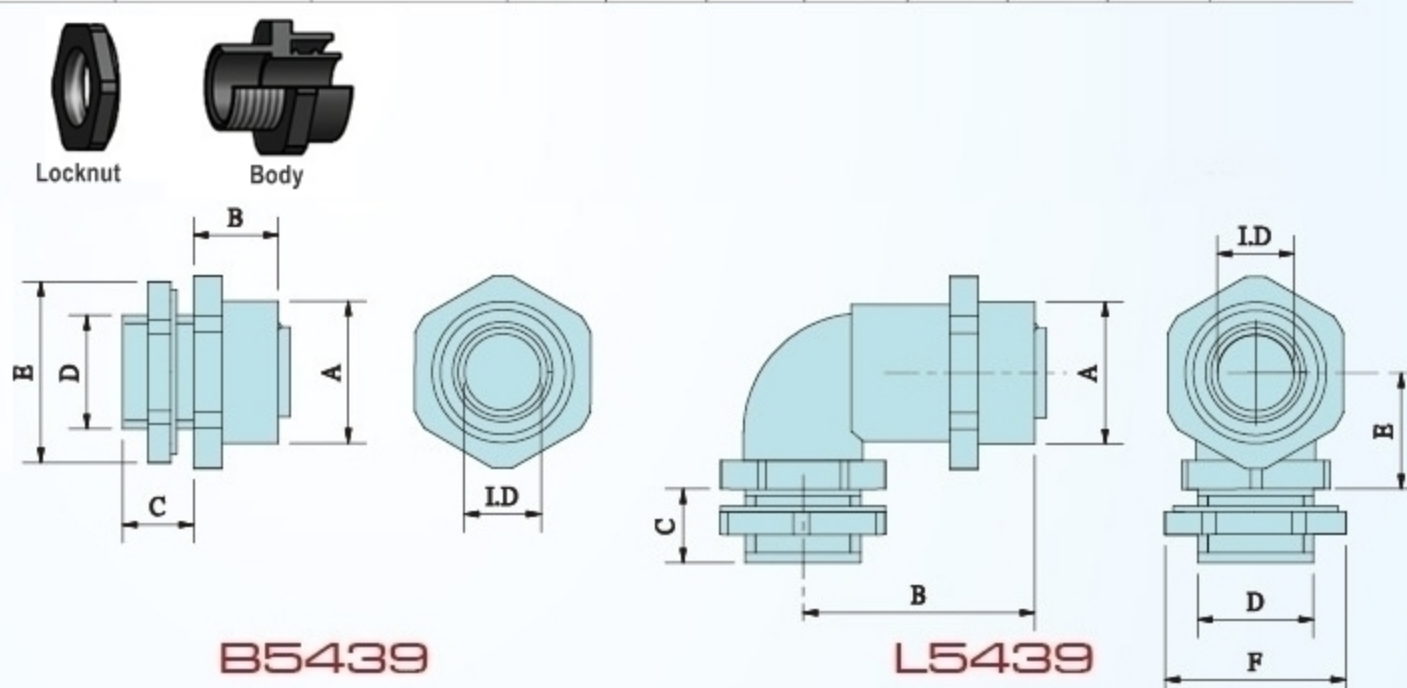

B5439

L5439

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)						Standard Packing (pcs)
			ID	A	B	C	D	E	
PF 1/2	3/8"	B54390300	10.5	21.5	15.0	13.0	21.0	32.0	100
PF 1/2	1/2"	B54390400	13.5	25.0	15.0	13.0	21.0	32.0	100
PF 3/4	3/4"	B54390600	18.5	31.0	18.0	13.0	26.4	40.0	50

Thread	Trade Size (inch)	Catalog Number	Dimension (mm)							Standard Packing (pcs)
			ID	A	B	C	D	E	F	
PF 1/2	3/8"	L54390300	10.5	21.5	36.0	13.0	21.0	20.0	32.0	50
PF 1/2	1/2"	L54390400	13.5	25.0	36.0	13.0	21.0	20.0	32.0	50
PF 3/4	3/4"	L54390600	18.5	31.0	41.5	13.0	26.4	25.0	40.0	25



B5439



L5439